



# Portioning scale

## L-EQ HS SERIES



Model:  
LEQ5-HS  
LEQ10-HS


### Product features

- ✓ Available in 10 lb and 20 lb capacity
- ✓ Toggles between kg, lb and oz with one button
- ✓ Robust stainless steel case and plate
- ✓ Programmable portioning audible alarm
- ✓ 100 hours duration rechargeable battery
- ✓ Pedal foot for tare operation (optional)
- ✓ Stainless Steel case and plate
- ✓ Easy-to-clean
- ✓ PC communication capabilities
- ✓ Adjustable leveling feet

### Product highlights



Easy weight visibility

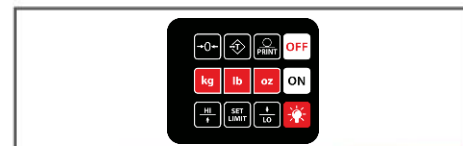

Easy-touch keyboard



Pedal foot for handsless operation

### Certifications



### Warranty






# Portioning scale

## L-EQ HS SERIES

### Dimensions

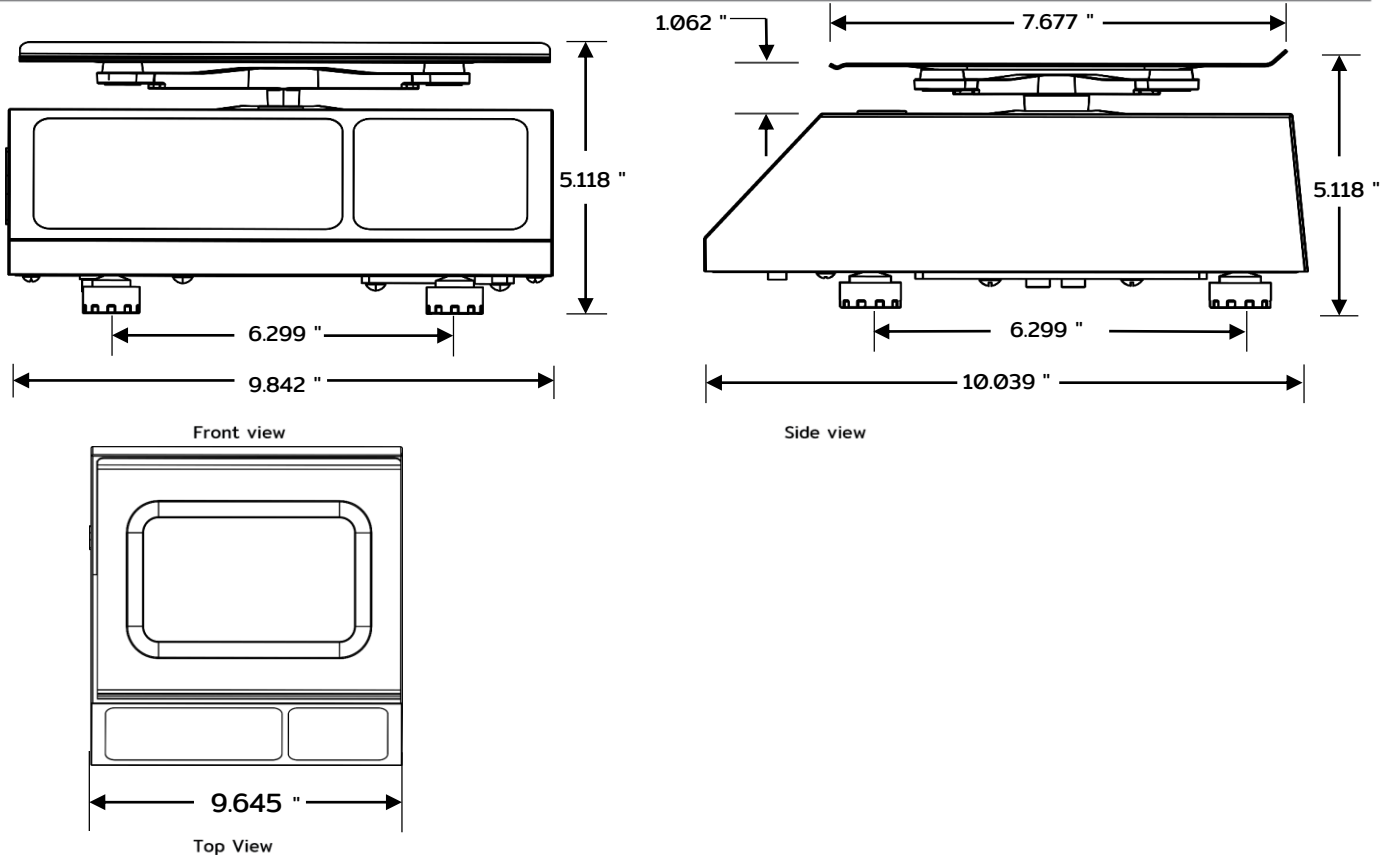

### Technical specifications

#### Dimensions

<b>External dimensions</b>	W: 9.842" D: 10.039" H: 5.118"
<b>Packaging dimensions</b>	W: 12.598" D: 12.204" H: 7.48"
<b>Gross weight</b>	11.023 lb.
<b>Net weight</b>	6.17 lb.
<b>Plate dimensions</b>	W: 9.585" D: 7.677" H: 0.320"

#### Construction

<b>Cabinet material</b>	Food grade stainless steel
<b>Plate material</b>	Food grade stainless steel
<b>Plate holder</b>	High strength reinforced plastic
<b>Leveling feet</b>	4

#### Logistic data

<b>Units per pallet</b>	90
<b>Dim. per pallet</b>	44.881" X 48.031" X 82.677"
<b>Storage temperature</b>	-4°F to 122°F (-20°C to 50°C)

#### Electrical data

<b>Power supply</b>	110/220VAC - 6VDC 500mA
<b>Plug type</b>	NEMA-1-15P
<b>Cord of length</b>	47.24"
<b>Battery</b>	4VDC 2.5A/h
<b>Lighting</b>	LED
<b>Display</b>	Liquid cristal display (LCD)

#### Performance data

<b>Capacity (LEQ5)</b>	10 lb / 5 kg / 160 oz
<b>Minimal division (LEQ5)</b>	1g / 0.002 lb / 0.05 oz
<b>Maximum tare (LEQ5)</b>	10 lb / 5 kg / 160 oz
<b>Capacity (LEQ10)</b>	20 lb / 10 kg / 320 oz
<b>Minimal division (LEQ10)</b>	2g / 0.005 lb / 0.10 oz
<b>Maximum tare (LEQ10)</b>	20 lb / 10 kg / 320 oz

#### Additional data

<b>Communication</b>	RS232 to PC or Printer
<b>Pedal foot dimensions</b>	W: 2.63" D: 4.015" H: 1.05"
<b>Pedal foot cord length</b>	83"
<b>Operation temperature</b>	14°F to 104°F (-10°C to 40°C)